

SPIGOLO WALL CEILING

Studiocharlie

Floor, wall/ceiling, pendant and table lamps based on an extruded and tubular aluminium structure, connected with moulded polymer joints, with white or black painted finish. Thanks to the joints, enabling the profiles to house LED sources, one can rotate 360° in order to produce a directional direct or indirect lighting, screened by an opaline diffuser in polycarbonate. The floor version is designed as such to provide a virtual divider to ambiances, while the ceiling and wall versions allow the enlightenment of the ambience in a versatile and a comfortable way.



LED 2700K

LAMPING

Source	linear LED
Total power	14W
Emission	orientable, diffused
Tension	110/240V
Color temperature	2700K
Luminous flux	560lm
Typ CRI	85
Energy class	A+
Materials	aluminium + PC + ABS
Notes	orientable diffuser 360°
Net lamp weight	1,5 kg

Codes

SPI LW2 31
SPI LN2 31

Structure


white
black

PACKAGE

Package 01

Dimension: 30x45x20 cm / Gross weight: 2,1 kg

Certificazioni

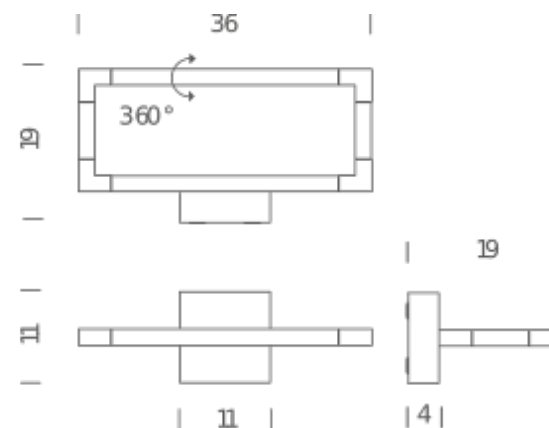

LED 3000K

LAMPING

Source	linear LED
Total power	14W
Emission	orientable, diffused
Tension	110/240V
Color temperature	3000K
Luminous flux	560lm
Typ CRI	85
Energy class	A+
Materials	aluminium + PC + ABS
Notes	orientable diffuser 360°
Net lamp weight	1,5 kg

Codes

SPI LWW 31
SPI LNN 31

Structure

white
black

PACKAGE

Package 01 Dimension: 30x45x20 cm / Gross weight: 2,1 kg

Certificazioni

